




SEMI TRAILER FLATBED WITH SIDES
FOUR AXLES TWIN ASSEMBLY
MECHANICAL - AIR SUSPENSION
GVW : 76T PAYLOAD : 65T

FT-SRPR4SRJ13.01

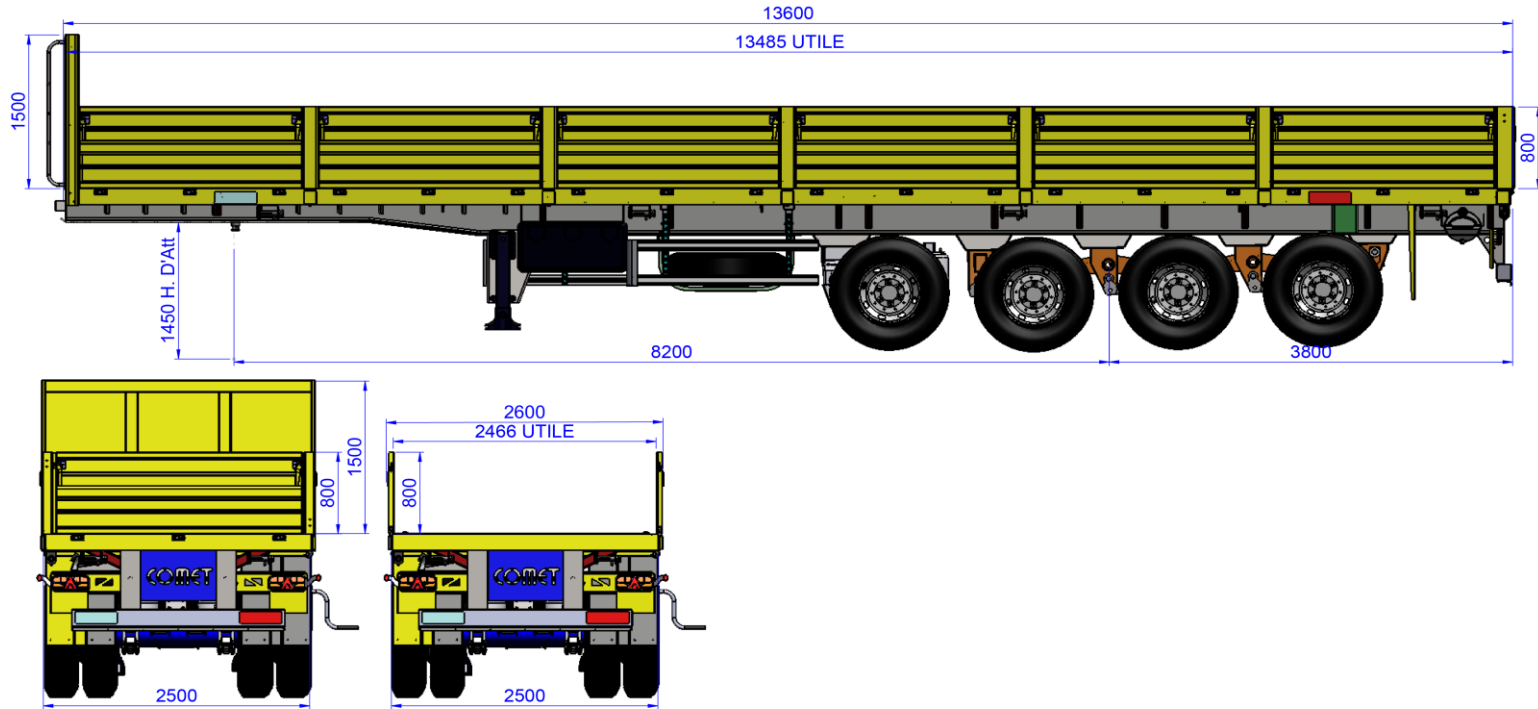

1/ FRAME:

Frame made of:

- Two beams IPE 450 with gooseneck conform to ISO 1726 to suit with all types of tractors.
- Ties sheet folded spacers rigidly consoles and the stringers.
- A plate coupling, 12 mm thick.

2/ TRAY :

Tray consists of :

- A floor plate grooved.
- A removable front panel.
- 13 side and rear panels removable and fold down, height: 800 mm.

3/ AXLES:

- Type 04 Axles.
- Four axles, tubular body 13 Tons.
- Mechanical drum brakes, controlled by cam S.
- In accordance with CE standards.

4/ RUNNIG GEAR:

- 03 axles with mechanical suspension
- 06 multi-leaf springs in manganosiliceous steel.
- 01 lift axle with air suspension.
- In accordance with CE standards.

(* Weight and dimensions subject to derogation at your expense for use in certain countries.

5/ BRAKING:

- Compressed air braking of **European** origin, **WABCO** brand, two-line with automatic corrector, in accordance with CE standards. Cam control provided by manual adjustment lever.
- Manual Park brakes with cable.

6/ LIGHTING AND SIGNALING:

- Lighting and signaling system of **European** origin, **ASPÖCK** brand.
- conform to the highway code and
- In accordance with CE standards.

7/ COUPLING:

- Mechanical landing gear **JOST** brand with two speeds:
 - Lifting capacity: 24T.
 - Static capacity: 50T.
- Dismantling kingpin 2" interchangeable at 3 1/2" **JOST** brand.

8/ PNEUMATICS:

- Sixteen (16) Tires (tubeless) 315/80 R 22.5 or 13R22.5.
- Twin assembly, on a disc wheel 9*22.5.

9/EQUIPMENTS :

- 01 Back bumper anti-fitting.
- 01 Pare –cycle conform to the highway code.
- 01 double Spare wheel supports.
- 01 Spare wheel.
- 09 Roller clamp
- Hooks on the sides.
- 01 Toolbox **DAKEN** brand.
- 01 Water reservoir with soap maker 32 L **TAKLER** brand.
- 02 Rear protection wings with mud flaps.
- 12 Twist locks for 20' or 40' container.
- Wheel lever Key.
- Maintenance guide.

10/ PRESENTATION AND PAINTING:

- Full Shot blasting
- Application:
 - 02 high quality primary layers
 - 02 layers of high quality finishing paint, available in all colors.

11/ OPTIONS:

- ABS.

To comply with the UEMOA code the payload will be :
41+20% = 53.2T