


**Body :** **21SEM Master MINE**

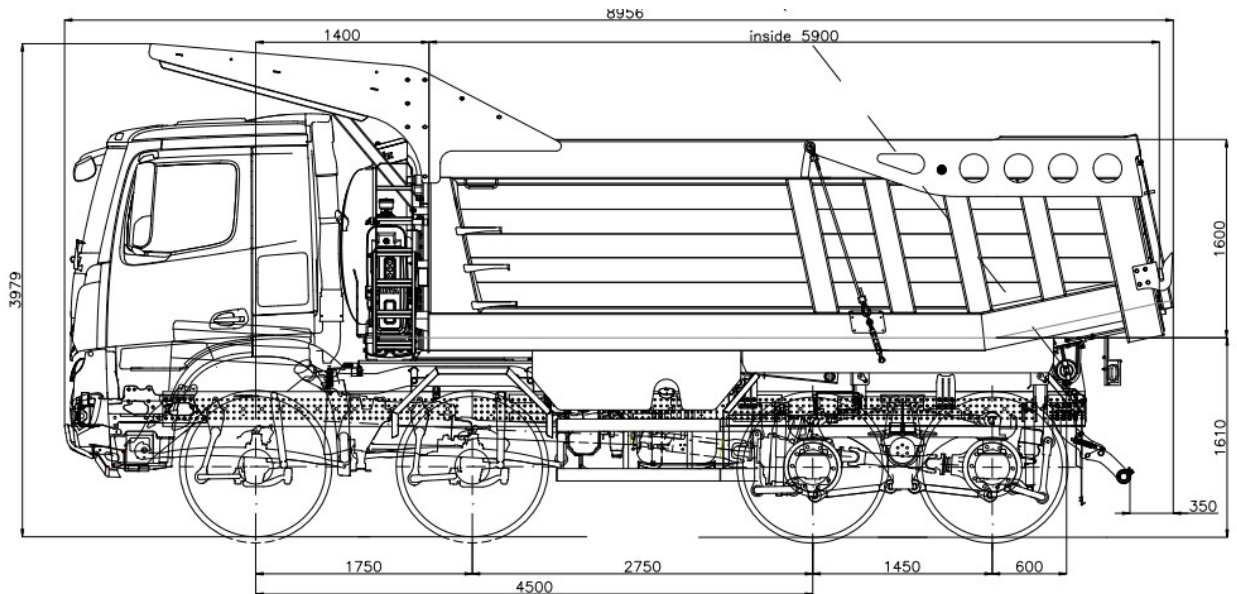

**Standard Equipment:**

|                          |  |
|--------------------------|--|
| Auxiliary frame:         | <p>steel structure, frame side member made of H=250 mm cold formed- <b>STEEL- S500</b><br/> structure reinforced with cross system (preventing from frame twisting) + reinforced mounting plates<br/> body props (security device for maintenance),<br/> scissor stabilizer between body and sub-frame<br/> Reinforced tipping axle with greasing bearing,<br/> Rubber/Teflon spacers on frame<br/> <b>Double HYFIX system with bolts</b></p>                            |
| Loading platform (box) : | <p>loading platform made from extra-fine steel:<br/> walls - #8 HB 450<br/> floor - #12 HB 450<br/> <i>tipping angle 50-52°</i><br/> volume – <b>approx 23 m3</b><br/> vertical front wall with roof on 2/3 of cab, ladder on left side, brackets for wheel wedges<br/> Body with ribs reinforcements under floor for maximum body strength, wall bent shape with ribs at rear<br/> Inclined floor at rear part – SCOW end<br/> Rear lamp mounted on flexible rubber</p> |
| Hydraulic:               | <p>HYVA Alfa hydraulic with oil tank, greasing brackets<br/> Oil- HLP 46<br/> tipping knock-off valve<br/> tipping valve with high pressure sensor</p>   |
| Painting:                | <p>all steel parts are shot peened two times before painting,<br/> painting carried out in painting booths<br/> subframe painted - <b>RAL 7021</b><br/> all brackets, mudguards and bumper painted in KTL or zinc coated, black colour</p>   |

|  |  |
|--|--|
| equipment:                                       | reflecting tapes ECE UN 48.3 (yellow)  |
|  | warning plate/stickers on subframe (2 pcs)                                       |
|  | rear lamps protection grill (painted in KTL, black colour)                       |
|  | Spare wheel holder on frame – wheel 22,5 in dimension 2,55 – 12R_24R out of 2,55 |
|  | lift for putting in/taking out a spare wheel                                     |
|  | Wielton labels (sides and rear)  |
| Optional equipment:                              | warning/information stickers (on subframe, tailgate, front wall)                 |
|  | Hydraulic pump   |
|  | Tipping control lever (mounted in cab)   |
|  | Hyva Hydraulic cylinder Hard hrome – with pump 113 L/m                           |
| Chassis equipment:                               | Rear flap- opening during tipping by steel rope                                  |
|  | PTO/PUMP   |
|  | Steps on battery <b>to confirm</b>   |
|  | tipping control lever (mounted in cab)   |
|  | wheel wedges 2 pcs   |
|  | side contour lamps   |
|  | indicator on the dashboard and wiring for raised body signal                     |
|  | preparation for subframe mounting (front brackets)                               |
| plate for mounting registration No               |  |
| mudguards on second front axle <b>to confirm</b> |  |