


Bodywork fitted on chassis + fridge

CHASSIS SPECIFICATIONS

Trade mark : MAN
Model : TGM 18.250 BB CH 4x2
G.V.W : 18 tons
Wheelbasis : 4425 mm
Voltage 24 v

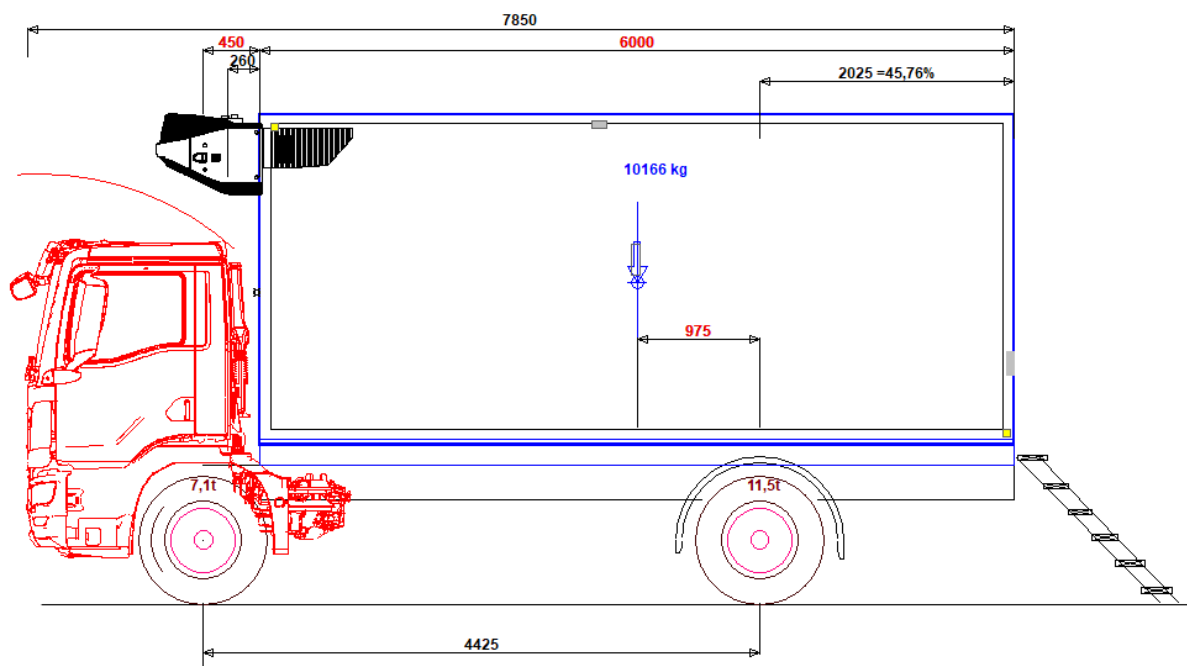

BODY CFR IR 65 (34,1 m³ - 14 euro-pallets - single-temp)

outer length : **6000** mm inner length : **5800** mm

outer width : **2600** mm inner width : **2454** mm

outer height : 2640 mm inner height : **2400** mm

Thickness of Panels

Floor : **130** mm Roof : **102** mm
Front : **117** mm Rear : **85** mm
Sides : **65** mm

Side wall laminate

Exterior : G.R.P. Interior : G.R.P.

Apertures

Stainless steel rear frame 2 doors - Total opening
2 stainless steel locking gears
3 stainless steel hinges per door
Opening priority to the right rear door



Floor

Grey antiskid GRP reinforced for trolleys
Without wheel recess under the floor
2 Drain holes with siphon Ø 40 front L&R

Inside equipments

250 mm Aluminium kick strip


1 row universal steel Combi-rail 3009 (surface mounted) on side walls
Location : 1000 mm

Chassis equipments

Galvanized steel subframe, welded model

1 rear pull out ladder 6 or 7 steps

Double aluminium sideguards
Plastic mudguards & mudflaps



General aspect

Bodywork : standard white RAL 9016
Outside capping in anodized aluminium
With reflective stickers

Fridge equipments

Front bulkhead reinforced + aperture for THERMO KING TX-800 R50

Other equipments

2 Rubber buffers 490*110*65 on the rear frame
2 Rubber buffers 310*80 on the chassis
2 Spring door retainers

2 led roof lights (1 led) **with 20 mn timer**

2 multifunction LED lights on top rear frame

FRIDGE UNIT

THERMO KING TX-800 R50 Diesel & stand-by 400 v

Cooling capacity at -20°C = 4200 W (8000 W at 0°C)

Air flow = 2700 m³/h

Three-phase power 380 v

Refrigerant R452a

Standard control box in cab

Automatic defrosting

Extra battery + battery box included

Cooling unit powered by the vehicle's fuel tank (no additional tank)

Fitting & commissioning included

Weight Body ~ 1950 kg + fridge unit 485 kg

1 single side door 1000*1950

1 side strip curtain, fixed